

24" FRONT-LOAD LAUNDRY PAIR FEATURES & SPECIFICATIONS

Model No.	WFC7500V 1200 RPM
Wash System	
Capacity	2.3 cu. ft.
Control Type	Rotary Electronic Knobs
Wash/Spin Speed Combinations	2 Tumble/ 8 Spin
Built-In Heater	Internal (140° F)
Motor	Variable
Circuit Breaker or Time Delay Fuse	15 or 20 Amp
Volts @ 60 Hz.	120
ENERGY STAR® Qualified†	Yes
Washer Controls	
Cycles	11
Normal Cycles	Yes
Heavy Soil (heater)	Yes
Whites	Yes
Normal	Yes
Colors	Yes
Casual/Permanent Press Cycles	Yes
Synthetic Cycles	Yes
Heavy Soil (heater)	Yes
Normal	Yes
Colors	Yes
Delicate Cycles	Yes
Handwash	Yes
Prewash	Yes
Quick Wash	Yes
Extra Rinse	Yes
Spin Only	Yes
Convenience	
Bleach Dispenser	Yes
Detergent Dispenser	Yes
Prewash Detergent Dispenser	Yes
Rinse/Spin	Yes
End-of-Cycle Signal	Yes
Automatic Temperature Control	—
Wash/Rinse Temperatures	4
Water Levels	Automatic
General Information	
Wash Basket	Stainless Steel
Approx. Shipping Weight (lbs.)	173
Color Availability*	W

* W – White

† As an ENERGY STAR® partner, Whirlpool Corporation has determined that products carrying the ENERGY STAR® emblem meet the ENERGY STAR® guidelines for energy efficiency.

Model No.	WED7500V	WCD7500V**
Drying System		
Capacity	3.8 cu. ft.	3.7 cu. ft.
Control Type	Rotary Electronic Knobs	Rotary Electronic Knobs
Motor	Variable	Variable
Circuit Breaker or Time Delay Fuse	15 or 20 Amp	15 or 20 Amp
Volts @ 60 Hz.	240	240
Dryer Controls		
Cycles	11	15
Regular	Yes	Yes
More Dry	Yes	Yes
Normal Dry	Yes	Yes
Less Dry	Yes	Yes
Damp Dry	Yes	Yes
Synthetic	Yes	Yes
More Dry	Yes	Yes
Normal Dry	Yes	Yes
Less Dry	Yes	Yes
Damp Dry	Yes	Yes
Timed Dry	Yes	Yes
60 Minute	Yes	Yes
40 Minute	Yes	Yes
20 Minute	Yes	Yes
Convenience		
End-of-Cycle Signal	Yes	Yes
Reversible Side-Swing Door	—	Yes
Drum Light	—	—
Wrinkle Control	No	Yes
Moisture Sensor Control	Yes — Sensor Baffles	Yes
Drying Temperatures	2—Normal, Low	2
General Information		
Electric Heating Element (watts)†	2500	—
Gas Heating Element (BTU)	—	—
Long Vent Exhaust System	Yes/Rear	Condensing
Approx. Shipping Weight (lbs.)	88	88.6
Drum	Stainless Steel	Stainless Steel
Color Availability*	W	W

* W – White

** Condensing dryer available in August 2008.

† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

24" FRONT-LOAD LAUNDRY PAIR DIMENSIONS

WASHER & DRYER DIMENSIONS

	Height Overall	Width (Cabinet Only)	Overall Depth (Door Open)	Overall Depth (Door Closed)
WFC7500V	32.9	23.4	36.2	20.1
WED7500V	33.25	23.375	39	22.2
WCD7500V	33.25	23.375	45.5	22.2

All dimensions are shown in inches.

DRYER VENTING REQUIREMENTS

EXHAUST INFORMATION

When you use only one type of metal vent...

1. Determine the number of elbows you will need.
2. In the column listing the type of metal vent you are using (rigid or flexible), find the maximum length of metal vent on the same line as the number of elbows.

Maximum Length of 4" Diameter Rigid Metal Duct

0	120 ft.
1	110 ft.
2	100 ft.
3	90 ft.
4	80 ft.
5	70 ft.

Maximum Length of 4" Flexible Metal Duct

0	40 ft.
1	37 ft.
2	33 ft.
3	30 ft.
4	27 ft.
5	23 ft.

The maximum length using a 2' x 6' rectangular vent with 2 elbows and transitioning into a 2 1/2' exhaust hood is 8 feet.

When you use a combination of rigid and flexible metal vent...

Example:
 You need to use 2 elbows
 You will use 5 feet flexible metal vent
 The maximum length of rigid metal vent you can use is 85 feet

Length of 4" Diameter Flexible Metal Duct


# of 90° Turns	0'	1'-5'	6'-10'	11'-15'	16'-20'	21'-25'
Maximum Length of 4" Rigid Metal Duct						
0	120 ft.	105 ft.	90 ft.	75 ft.	60 ft.	45 ft.
1	110 ft.	95 ft.	80 ft.	65 ft.	50 ft.	35 ft.
2	100 ft.	85 ft.	70 ft.	55 ft.	40 ft.	25 ft.
3	90 ft.	75 ft.	60 ft.	45 ft.	30 ft.	15 ft.
4	80 ft.	65 ft.	50 ft.	35 ft.	20 ft.	5 ft.
5	70 ft.	55 ft.	40 ft.	25 ft.	10 ft.	0 ft.

INFORMATION ON STEAM DRYER INSTALLATION WE/GD9600T, WE/GD9500T & WE/GD6600V

CONNECT INLET HOSE


The dryer must be connected to the cold water faucet using the new inlet hoses. Do not use old hoses.

1. Turn cold water faucet off and remove washer inlet hose.
 2. Remove old rubber washer from inlet hose and replace with new rubber washer provided. If space permits, attach the brass female end of the "Y" connector to the cold water faucet.
- NOTE:** If "Y" connector can be attached directly to cold water faucet, go to Step 6. If "Y" connector cannot be attached directly to the cold water faucet, the short hose must be used. Continue with Step 3.
3. Attach short hose to cold water faucet. Screw on coupling by hand until it is seated on faucet.
 4. Using pliers, tighten the couplings with an additional two-thirds turn.

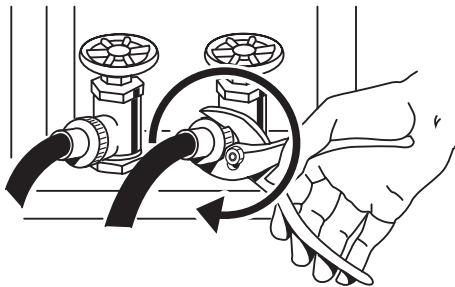


NOTE: Do not overtighten. Damage to the coupling can result.

5. Attach "Y" connector to brass male end of small hose. Screw on coupling by hand until it is seated on connector.
6. Attach straight end of long hose to "Y" connector.
7. Attach washer cold inlet hose to other end of "Y" connector. Screw on coupling by hand until it is seated on connector.
8. Using pliers, tighten the couplings with an additional two-thirds turn.

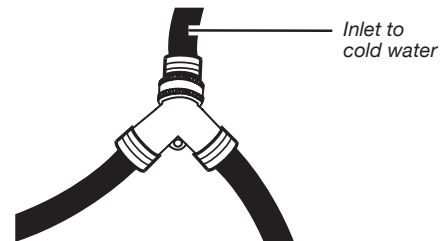

NOTE: Do not overtighten. Damage to the coupling can result.

9. Attach angled end of long hose to fill valve at bottom of dryer back panel. Screw on coupling by hand until it is seated on fill valve connector.
10. Using pliers, tighten the coupling with an additional two-thirds turn.

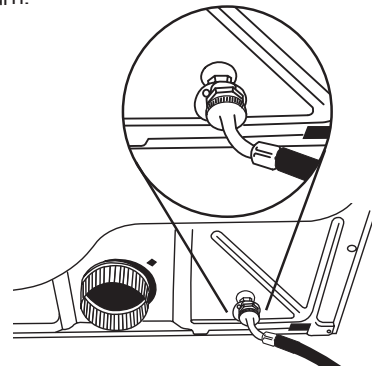

NOTE: Do not overtighten. Damage to the coupling can result.

11. Check that the water faucets are on.
12. Check for leaks around "Y" connector, faucet and hoses.

DRYER VENTING REQUIREMENTS


SURE CONNECT™ VENT KIT

Part No. 4396028

- Provides 4 1/2" clearance between dryer and wall
- Snap-lock fittings
- Total kit length: 8 feet
- Additional vent can be snapped between sections for longer runs

Kit Contains:


- 2-4' vent sections with attached close elbows
- 1-Wall plate for close clearance installations
- 2-4" clamps



LP Gas Conversion Kits	Part No.
24" Thin Twin® Dryer and Compacts (10,500 BTU)	49573
27" Thin Twin® Dryer (16,000 BTU)	3392235
Full-Size Gas Dryers (22,000 BTU)	49572
Front-Load Dryer	8576846A
Optional Dryer Rack	
Extra Large Capacity (Large Side-Swing Only Door)	689790
Super Capacity 6.5 cu. ft. (Side-Swing or Hamper Door)	3404351
Super Capacity 7.0 cu. ft.	3406839
Duet® and Duet Sport® (Replaces 8521957A and 8563738A)	W10121663
29" (Oval Door Opening Models)	280115
Cabrio®	W10071550A
Ultra-Capacity (Hamper Door Only)	8212450A
4-Way Venting Kit	
White	279818
Biscuit	279925
Pewter	279969
Black	279820
Ocean Blue	280102
Diamond Dust	280171A
Aspen	W10152954
Tuscan Chestnut	W10152955

FABRIC FRESHENER FEATURES & SPECIFICATIONS


Model No.	LRF4001RY
Heavy Duty Cycle	
Heavy Cotton/Cotton Blends	Yes
Normal Cycle	
Wool	Yes
Sweaters	Yes
Easy Care Garments	Yes
Delicate Cycle	
Silk	Yes
Rayon	Yes
Polyester	Yes
General Information	
Electrical	Standard—2 Prong
Volts @ 60 Hz.	120
Power Cord Length (ft.)	8
Installed Weight (lbs.)	27
Color Availability	Vapor Blue

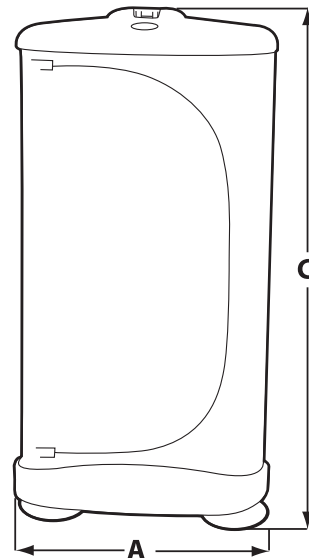

FABRIC FRESHENER DIMENSIONS

	Width A	Depth B	Height C
Open	32 1/2	12	57 1/8
Closed	32 1/2	12	10

All dimensions are shown in inches.



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

COMPACT WASHER & DRYER FEATURES & SPECIFICATIONS

COMPACT WASHER

Model No.	22" LCE4332P Portable
Wash System	
Capacity (cu. ft.)	2.1
Wash & Spin Speeds	3 Wash/1 Spin
Gentle Wash System	Yes
Straight-Vane Agitator	Yes
Easy-to-Clean Lint Filter	Yes
Washer Controls	
Automatic Cycles	4
Normal	Yes
Heavy Duty	Yes
QuickWash	Yes
Delicate	Yes
Wash/Rinse Temperatures	3
Water Levels	2
Convenience	
Bleach Dispenser	Yes
Fabric Softener Dispenser	Yes
Lighted Cycle Indicators	Yes
General Information	
Wash Basket	Stainless Steel
Motor (hp)	1/4
Approx. Shipping Weight (lbs.)	85
Color Availability*	Q


* Q - White

COMPACT DRYER

Model No.	24" LDR3822P Electric Only	24" LER3622P Electric Only
Drying System		
Capacity (cu. ft.)	3.4	3.4
Gentle Heat System	Yes	Yes
Lint Screen	Internal	Internal
Dryer Controls		
Temperature Settings	2	2
Heavy High (heat)	Yes	Yes
Permanent Press/Heavy High (air)	Yes	—
Timer Cycles	3	3
Automatic Dry	Yes	Yes
Permanent Press/ Regular	Yes	Yes
Timed Drying	Yes	Yes
Fluff Air	Yes	Yes
Convenience		
Side-Swing Door	Yes	Yes
End-of-Cycle Signal	Yes	Yes
DuraWhite™ Interior	Yes	Yes
General Information		
Electric Heating Element (watts)	120V/1400W	240V/3000W
Motor (hp)	1/4	1/4
Installed Cord (ft.)	6	—
Approx. Shipping Weight (lbs.)	100	100
Color Availability*	Q	Q


* Q - White

COMPACT DIMENSIONS

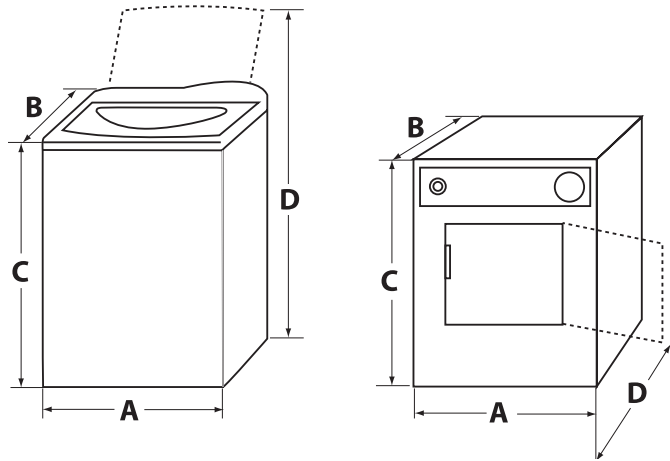

COMPACT WASHER DIMENSIONS

Width	Depth	Top Height	Maximum Height with Lid Open
A	B	C	D
22 3/8"	24 3/8"	38 1/4"	51 1/4"

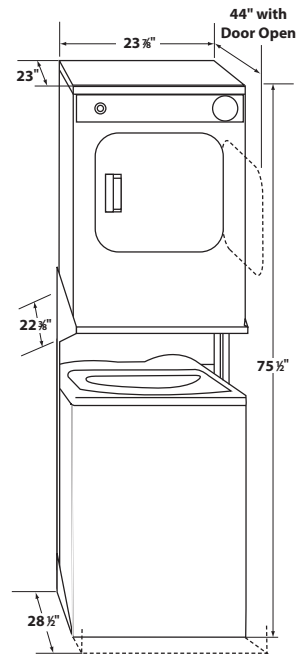

Optional Stack Stand Kit (white) part #49971

COMPACT DRYER DIMENSIONS

Width	Depth	Top Height	Depth with Door Open
A	B	C	D
23 3/8"	21 15/16"	32"	37 3/16"

COMPACT WASHER CASTER KITS

	Part No.
Stationary to Portable	285768
Portable to Stationary	4396746


All dimensions are shown in inches.

DRYER VENTING REQUIREMENTS

EXHAUST INFORMATION

All dryers require the equivalent of a 4 inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.


27" & 29" DRYER VENTING REQUIREMENTS



# of 90° Turns	4" Hood	4" Hood	2 1/2" Hood
Maximum Length of 4" Diameter Rigid Metal Duct			
0	64 ft.	64 ft.	58 ft.
1	54 ft.	54 ft.	48 ft.
2	44 ft.	44 ft.	38 ft.
3	35 ft.	35 ft.	29 ft.
4	27 ft.	27 ft.	21 ft.
Maximum Length of 4" Diameter Flexible Metal Duct			
0	36 ft.	36 ft.	28 ft.
1	31 ft.	31 ft.	23 ft.
2	27 ft.	27 ft.	19 ft.
3	25 ft.	25 ft.	17 ft.
4	23 ft.	23 ft.	15 ft.

LONG-VENT DRYER VENTING REQUIREMENTS


The same length of vent can be used with any of the three exhaust hoods shown.



# of 90° Turns	4" Hood	4" Hood	2 1/2" Hood
Maximum Length of 4" Diameter Flexible Metal Duct			
0	120 ft.	120 ft.	120 ft.
1	119 ft.	119 ft.	110 ft.
2	100 ft.	100 ft.	100 ft.
3	90 ft.	90 ft.	90 ft.
4	80 ft.	80 ft.	80 ft.
5	70 ft.	70 ft.	70 ft.

Exhaust vent charts list lengths by type of vent to be used. Use the chart that matches your vent type.

COMPACT DRYER VENTING REQUIREMENTS



# of 90° Turns	4" Hood	4" Hood	2 1/2" Hood
Maximum Length of 4" Diameter Flexible Metal Duct			
0	43 ft.	41 ft.	36 ft.
1	33 ft.	31 ft.	26 ft.
2	23 ft.	21 ft.	16 ft.
3	30 ft.	29 ft.	24 ft.
4	24 ft.	23 ft.	18 ft.
5	16 ft.	15 ft.	10 ft.

DRYER VENTING REQUIREMENTS


SURE CONNECT™ VENT KIT

Part No. 4396028

- Provides 4 1/2" clearance between dryer and wall
- Snap-lock fittings
- Total kit length: 8 feet
- Additional vent can be snapped between sections for longer runs

Kit Contains:


- 2-4' vent sections with attached close elbows
- 1-Wall plate for close clearance installations
- 2-4" clamps



LP Gas Conversion Kits	Part No.
24" Thin Twin® Dryer and Compacts (10,500 BTU)	49573
27" Thin Twin® Dryer (16,000 BTU)	3392235
Full-Size Gas Dryers (22,000 BTU)	49572
Front-Load Dryer	8576846A
Optional Dryer Rack	
Extra Large Capacity (Large Side-Swing Only Door)	689790
Super Capacity 6.5 cu. ft. (Side-Swing or Hamper Door)	3404351
Super Capacity 7.0 cu. ft.	3406839
Duet® and Duet Sport® (Replaces 8521957A and 8563738A)	W10121663
29" (Oval Door Opening Models)	280115
Cabrio®	W10071550A
Ultra-Capacity (Hamper Door Only)	8212450A
4-Way Venting Kit	
White	279818
Biscuit	279925
Pewter	279969
Black	279820
Ocean Blue	280102
Diamond Dust	280171A
Aspen	W10152954
Tuscan Chestnut	W10152955

FABRIC FRESHENER FEATURES & SPECIFICATIONS


Model No.	LRF4001RY
Heavy Duty Cycle	
Heavy Cotton/Cotton Blends	Yes
Normal Cycle	
Wool	Yes
Sweaters	Yes
Easy Care Garments	Yes
Delicate Cycle	
Silk	Yes
Rayon	Yes
Polyester	Yes
General Information	
Electrical	Standard—2 Prong
Volts @ 60 Hz.	120
Power Cord Length (ft.)	8
Installed Weight (lbs.)	27
Color Availability	Vapor Blue

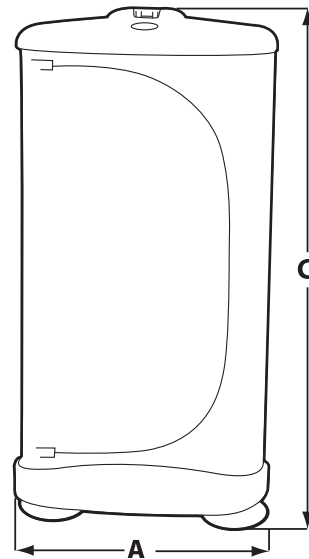

FABRIC FRESHENER DIMENSIONS

	Width A	Depth B	Height C
Open	32 1/2	12	57 1/8
Closed	32 1/2	12	10

All dimensions are shown in inches.



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.